




CPL™ 15B

Loudspeaker System

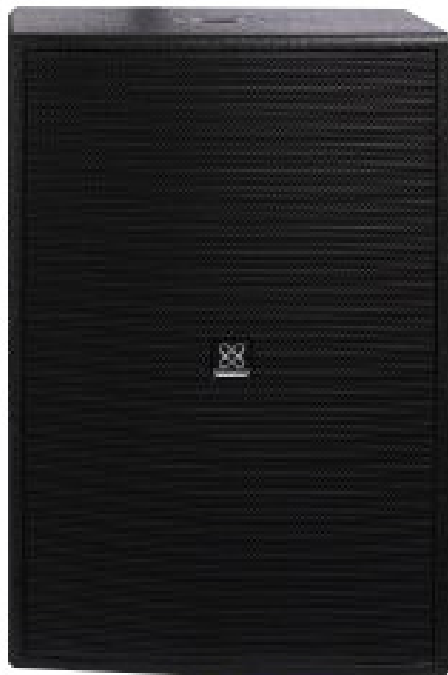

Product
Specifications

SPECIFICATIONS

Crest Audio® CPL™ 15B

The new CPL enclosure series features high power ratings with custom components, a sleek look and a unique, snap-in metal grille. The CPL 15B is a powerful subwoofer designed to compliment the other CPL speakers, and features one maximum-performance 15" woofer. It is rated at 500 Watts continuous and 1000 Watts peak. This speaker system is ideal for smaller venues where space is at a premium. Connections include a NL-4 four-pin twist-lock jack, and a screw terminal barrier strip. The CPL Series is available in black.

*Features

- Subwoofer sound reinforcement enclosure
- Designed for permanent installations
- Premium 15" woofer
- Available in black
- Continuous power: 500 W
Peak power: 1000 W peak power handling
- 37Hz—2.9 kHz
- 96 dB at 1W/1m
- 8 Ohms
- NL4 4-pin twist-lock jack: 2-Position screw terminal block
- Handles on either side
- Four feet for stage use
- Stand cup for Satellite Pole

Specification:

- Type: 15 inch subwoofer
Continuous power: 500W
Peak power: 1000W
- Impedance: 8 OHMS
- Sensitivity (1W@1m): 96 dB
- Maximum sound pressure level (1 meter): 123 dB @ 500W / 126 dB @ 1000W peak
- Frequency response, 1 meter on-axis, swept-sine in anechoic environment:
37Hz—2.9 kHz, +/- 6 dB
- Nominal coverage pattern (-6dB): 360° H×360° V


- Transducer complement: 1 x 15" woofer 4" VC (100mm)
- Input connections: NL4 4-pin jack × 1 PIN 1+ = (+) POSITIVE, PIN 1- = (-) NEGATIVE
PIN 2+ and PIN 2-, NC

2-Position screw terminal block
- Material: 18mm (0.7") plywood
- Surface treatment: Black textured polyester paint
- Dimensions: H 699mm x W 467mm x D 510mm
H 27.51" x W 18.38" x D 20.08"
(Note: height is with feet included)
- Packing size: H 770mm x W 540mm x D 580mm
H 30.31" x W 21.26" x D 22.83"
- Net Weight: 34.7kg (77 lbs.)

Flying or Mounting the CPL Enclosure

 CAUTION:

This enclosure is not designed to be flown or hung overhead, use only on the ground or stage!
If a speaker is placed atop a pole on the Sub, make sure the CPL-15B Sub is on level ground or a level platform for safety and stability.

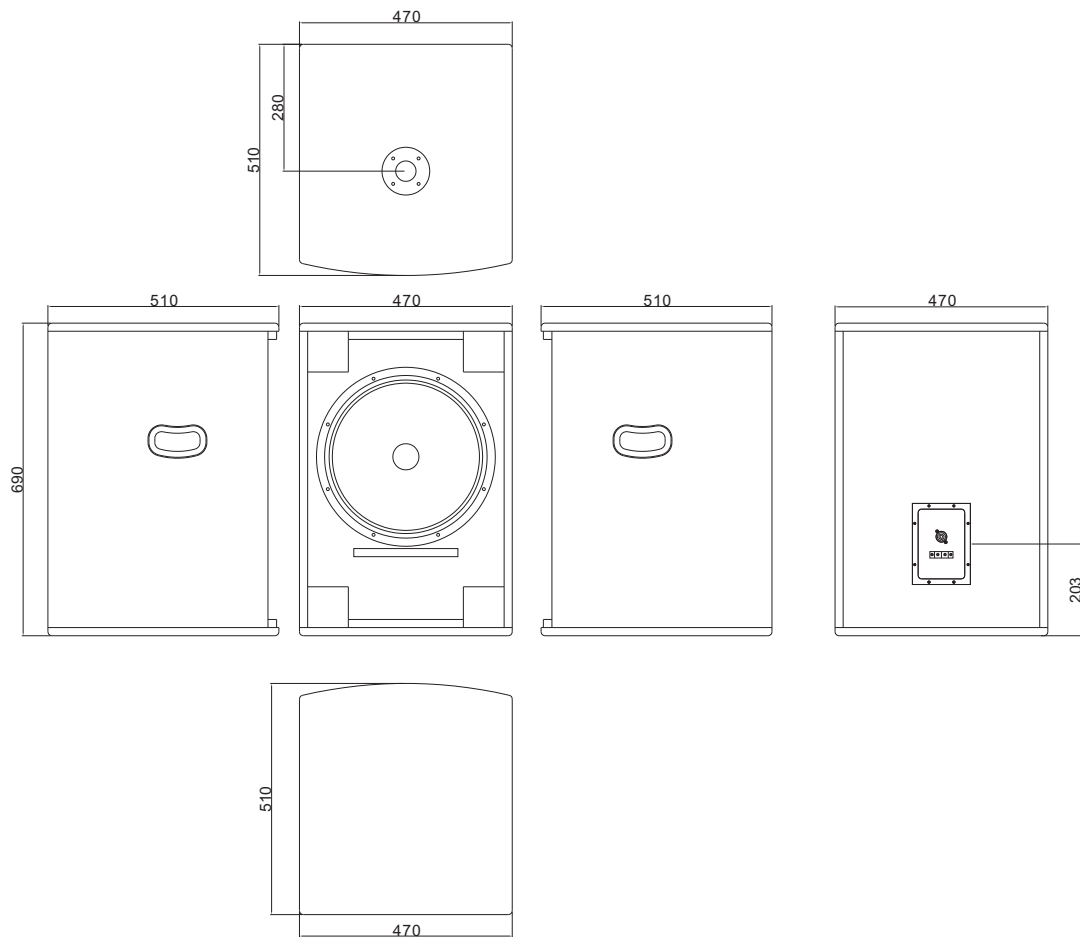



www.peaveycommercialaudio.com

Warranty registration and information for U.S. customers available online at
www.peaveycommercialaudio.com/warranty
or use the QR tag below



Features and specifications subject to change without notice.

Crest Audio 5022 HWY 493 N. Meridian, MS 39305 (601) 483-5365 FAX (601) 486-1278



Logo referenced in Directive 2002/96/EC Annex IV
(OJ(L)37/38, 13.02.03 and defined in EN 50419: 2005
The bar is the symbol for marking of new waste and
is applied only to equipment manufactured after
13 August 2005